


BILTON AIR SIDE 450 2019

BLAIRS0450024DC14667840000W05

Article no.: 101318

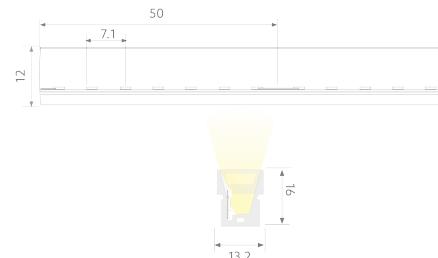

24
V

Lamp voltage

5000
mm

Max. length

>80

Colour rendering index CRI

450
lm

luminous flux per meter

TENDER TEXT


BILTONAIR SIDE 450 LED strip 24VDC 14,6W/m IP67 CRI>80 4000K WHITE 5m LED module BILTON AIR SIDE 450 2019 Article 101318 Linear LED light strip on a flexible circuit board. Installation using appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 50000 h. The BILTON AIR SIDE 450 2019 LED-strip has a luminous flux of 450 lm at 14.6 W, resulting in an efficiency of 31 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5000 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IP67 Smallest possible bending radius 200 mm Dimension (L x W x H): 5010.0 mm x 13.2 mm x 16.0 mm

TOP-FEATURES

//__ Homogeneously illuminated light line with no visible light points

//__ IP67 protection in highly flexible silicone jacket

//__ Unlimited freedom of design (flexibly deformable and separable)



BILTON AIR SIDE 450 2019

BLAIRS0450024DC14667840000W05

Article no.: 101318



MECHANICAL DATA

Width [mm]	13.2
Length [mm]	5010.0
Height/depth [mm]	16
Height [mm]	16.0
Colour	White
Model	Schlauch
Self-adhesive	nein
Lamp type	LED nicht austauschbar
Distance [mm]	7.14
Distance relating to	LED zu LED
Degree of protection (IP)	IP67
Length of particular segments [mm]	50.0
Lowest bending radius [mm]	200
With connection set	yes
With end piece	yes
Number of lamps per meter	140

ELECTRICAL DATA

Protection class	ohne
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	14.6
Overall efficiency [lm/W]	31

LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Colour temperature [K]	4000
Colour of light	White
Luminous flux per meter [lm]	450
Colour consistency (McAdam ellipse)	SDCM3

CONNECTION

Conductor cross section [mm ²]	0.5
Number of poles	2
Max. length [mm]	5000

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 20 ... + 50
----------------------------------	---------------

BILTON AIR SIDE 450 2019

BLAIRS0450024DC14667840000W05

Article no.: 101318



Ambient temperature during operating [°C]	- 20 ... + 45
Rated life time L80/B10 at 25 °C [h]	50000

PACKAGING INFORMATION

EAN	4250716930740
Article no.	101318
Net weight [g]	1130
Gross weight [g]	1130
Gross width [mm]	330.0
Gross height [mm]	27.0
Gross length [mm]	330.0
Customs tariff number	94054039
Net width [mm]	13.2
Net height [mm]	16
Net length [mm]	5010
State of origin	AT

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

NECESSARY ACCESSORIES

Article	Article no.
Wall profile AIR SIDE	170886
Safety clip AIR SIDE	170917
Safety clip AIR MULTI	170918

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at