


BL AIR TOP 450 EOL

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 830 1m

Article no.: 102127

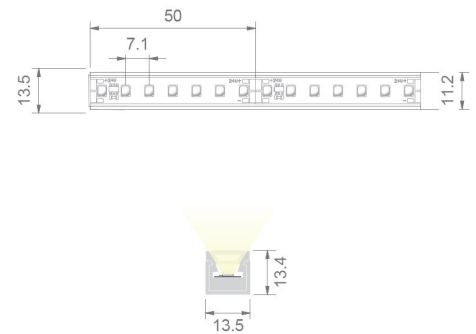

Lamp voltage



Max. length



Colour rendering index CRI



Luminous flux per meter

TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 450 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, 24VDC 7.2W/m IP67 CRI>80 3000K WHITE 1.01m LED module BL AIR TOP 450 EOL Article 102127 The BL AIR TOP 450 EOL LED light tube has a luminous flux of 450 lm at a power of 7.2 W, which results in an efficiency of 63 lm/W. With a nominal voltage of 24 V DC at the connection, a maximum module length of 5010 mm can be achieved. In terms of lighting, the module has a color temperature of 3000 K and a beam angle of 120°. All with a color rendering index of >80 and a binning selection according to SDCM3 (MacAdams). The light strip can be divided every 50.0 mm, resulting in an LED spacing of 7.14 mm. Protection class IP67, Smallest possible bending radius 200 mm. At an ambient temperature of 85°C, a service life of 50,000 hours can still be guaranteed. Up to 95°C, the service life is 30,000 hours and at temperatures of 100°C it is still 16,000 hours (> L70B50). Dimensions (L x W x H): 1010.0 mm x 13.2 mm x 12.0 mm

TOP-FEATURES

- //__ Homogeneously luminous light line without visible light points
- //__ IP67 -protection in highly flexible silicone jacket
- //__ New connection: the end caps close straight to the profile



BL AIR TOP 450 EOL

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 830 1m

Article no.: 102127



MECHANICAL DATA

| | |
|------------------------------------|------------------------|
| Width [mm] | 13.2 |
| Length [mm] | 1010.0 |
| Height/depth [mm] | 12 |
| Height [mm] | 12.0 |
| Colour | White |
| Model | Schlauch |
| Self-adhesive | nein |
| Lamp type | LED nicht austauschbar |
| Distance [mm] | 7.14 |
| Distance relating to | LED zu LED |
| Degree of protection (IP) | IP67 |
| Length of particular segments [mm] | 50.0 |
| Lowest bending radius [mm] | 200 |
| Number of lamps per meter | 140 |

ELECTRICAL DATA

| | |
|---------------------------|---------|
| Protection class | III |
| Voltage type | DC |
| Lamp voltage [V] | 24 |
| Input voltage range [V] | 23 - 25 |
| Lamp power per meter [W] | 7.2 |
| Overall efficiency [lm/W] | 63 |

LIGHT TECHNICAL DATA

| | |
|-------------------------------------|-------|
| Beam angle [°] | 120 |
| Colour rendering index CRI | >80 |
| Colour temperature [K] | 3000 |
| Colour of light | White |
| Luminous flux per meter [lm] | 450 |
| Colour consistency (McAdam ellipse) | SDCM3 |

CONNECTION

| | |
|-------------------------------|------|
| Conductor cross section [mm²] | 0.5 |
| Number of poles | 2 |
| Max. length [mm] | 5010 |

TEMPERATURE TECHNICAL DATA

| | |
|---|---------------|
| Ambient/storage temperature [°C] | - 20 ... + 55 |
| Ambient temperature during operating [°C] | - 20 ... + 55 |
| Rated life time L80/B10 at 25 °C [h] | 50000 |

BL AIR TOP 450 EOL

BL AIR Top LED ligth tube 450lm/m 24VDC 7.2W/m IP67 830 1m

Article no.: 102127



PACKAGING INFORMATION

| | |
|-----------------------|----------|
| Article no. | 102127 |
| Net weight [g] | 0.125 |
| Gross weight [g] | 0.125 |
| Gross width [mm] | 330.0 |
| Gross height [mm] | 27.0 |
| Gross length [mm] | 330.0 |
| Customs tariff number | 94054039 |
| Net width [mm] | 13.2 |
| Net height [mm] | 12 |
| Net length [mm] | 1010 |
| State of origin | AT |

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at