


# BL AIR TOP 600

BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 830 5m

Article no.: 102112

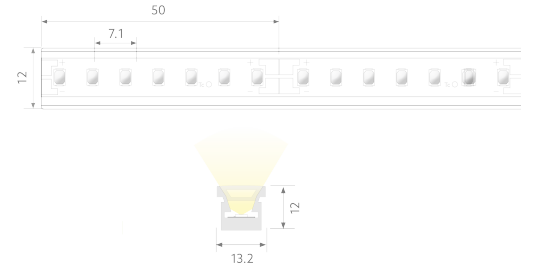

Lamp voltage



Max. length



Colour rendering index CRI




Luminous flux per meter

## TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 600 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, 24VDC 7.5W/m IP67 CRI>80 3000K WHITE 5m

## TOP-FEATURES

- //\_ Homogeneously luminous light line without visible light points
- //\_ IP67 -protection in highly flexible silicone jacket
- //\_ New connection: the end caps close straight to the profile



# BL AIR TOP 600

BL AIR Top LED light tube 600lm/m 24VDC 7.5W/m IP67 830 5m  
Article no.: 102112



## MECHANICAL DATA

Width [mm]	13.2
Length [mm]	5010.0
Height/depth [mm]	12
Height [mm]	12.0
Colour	White
Model	Schlauch
Self-adhesive	nein
Lamp type	LED nicht austauschbar
Distance [mm]	7.14
Distance relating to	LED zu LED
Degree of protection (IP)	IP67
Length of particular segments [mm]	50.0
Lowest bending radius [mm]	200
Number of lamps per meter	140

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	7.5
Overall efficiency [lm/W]	80

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Colour temperature [K]	3000
Colour of light	White
Luminous flux per meter [lm]	600
Colour consistency (McAdam ellipse)	SDCM3

## CONNECTION

Conductor cross section [mm <sup>2</sup> ]	0.5
Number of poles	2
Max. length [mm]	5010

## TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 20 ... + 55
Ambient temperature during operating [°C]	- 20 ... + 55
Rated life time L80/B10 at 25 °C [h]	50000

# BL AIR TOP 600

**BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 830 5m**  
Article no.: 102112



## PACKAGING INFORMATION

EAN	4250716944471
Article no.	102112
Net weight [g]	609
Gross weight [g]	609
Gross width [mm]	330.0
Gross height [mm]	27.0
Gross length [mm]	330.0
Customs tariff number	94054039
Net width [mm]	13.2
Net height [mm]	12
Net length [mm]	5010
State of origin	AT

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of +/- 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

## NECESSARY ACCESSORIES

Article	Article no.
<b>Mounting clip for AIR TOP</b>	<b>171149</b>
<b>Safety clip for AIR TOP</b>	<b>170918</b>
<b>Surface mounted profile PC for AIR TOP</b>	<b>170885</b>
<b>End cap set for AIR TOP</b>	<b>171555</b>
<b>Surface mounted profile Alu for AIR TOP</b>	<b>171031</b>

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)