


COR Pure COB IP65NA

BL COR Pure COB LED-Strip 1010lm/m 24VDC 10W/m IP65NA 940 20m

Article no.: 172076

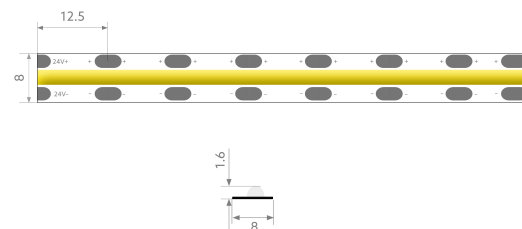

IP65NA

Degree of protection (IP)

12.5

mm

Length of particular segments

4000

K

Colour temperature

1010

lm

Luminous flux per meter

TENDER TEXT

LED-Lichtband COR Pure COB 1010lm/m 24VDC 10W/m 101lm/W IP65NA CRI>90 4000K WHITE ohne Anschlusskabel, 20 Meter/Rolle LED module COR Pure COB IP65NA Article 172076 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Suitable for ambient temperatures from -25 ... +40 °C at a service life of 60000 h 60000 h . The COR Pure COB IP65NA LED-strip has a luminous flux of 1010 lm at 10.0 W, resulting in an efficiency of 101 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5000 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 140°. All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 12.5 mm, resulting in a LED distance of 1.56 mm. Degree of protection IP65NA Dimension (L x W x H): 20000.0 mm x 8.0 mm x 1.6 mm

TOP-FEATURES

//__ LED strip, all 12.5 mm separable

//__ Without soldering connection

//__ 24 V-Single LED per cut for more flexible application

24 V

>90

IP65NA

4000 K

COR Pure COB IP65NA

BL COR Pure COB LED-Strip 1010lm/m 24VDC 10W/m IP65NA 940 20m

Article no.: 172076



MECHANICAL DATA

Width [mm]	8.0
Length [mm]	20000.0
Height/depth [mm]	1.5
Height [mm]	1.6
Model	Band
Self-adhesive	yes
Lamp type	LED nicht austauschbar
Distance [mm]	1.56
Distance relating to	LED zu LED
Degree of protection (IP)	IP65NA
Length of particular segments [mm]	12.5
Number of lamps per meter	640

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	10.0
Overall efficiency [lm/W]	101

LIGHT TECHNICAL DATA

Beam angle [°]	140
Colour rendering index CRI	>90
Colour temperature [K]	4000
Colour of light	White
Luminous flux per meter [lm]	1010
Colour consistency (McAdam ellipse)	SDCM3

CONNECTION

Conductor cross section [mm²]	0.5
Number of poles	2
Max. length [mm]	5000

TEMPERATURE TECHNICAL DATA

Ambient temperature during operating [°C]	- 25 ... + 40
Rated life time L70/B50 at 25 °C [h]	60000
Rated life time L80/B10 at 25 °C [h]	60000

COR Pure COB IP65NA

BL COR Pure COB LED-Strip 1010lm/m 24VDC 10W/m IP65NA 940 20m

Article no.: 172076



PACKAGING INFORMATION

EAN	4250716952278
Article no.	172076
Net weight [g]	360
Gross weight [g]	450
Gross width [mm]	300.0
Gross height [mm]	15.0
Gross length [mm]	340.0
Customs tariff number	9405423990
Net width [mm]	8.0
Net height [mm]	1.6
Net length [mm]	20000
State of origin	CN

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at