


# BL COR Pure COB

BL COR Pure COB LED strip 1220lm/m 24VDC 10W/m IP20 930 5m


Article no.: 172312

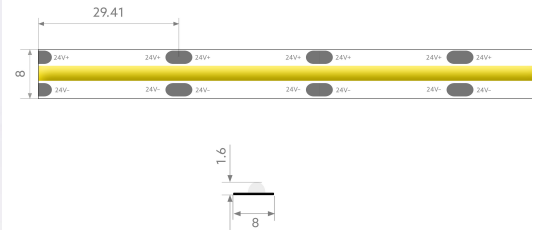

Degree of protection (IP)



Length of particular segments



Colour of light



Colour

## TENDER TEXT


LED strip light LED type: COB 1220 lm/m 24VDC 10W/m 122lm/W IP20 CRI>90 3000K, one-sided connection cable 50 cm, WHITE Colors and BLT label 5 meters

## TOP-FEATURES

//\_\_ Dot-free gelb LED light line with large beam angle 142°

//\_\_ Color rendering >90

//\_\_ Easy installation



# BL COR Pure COB

BL COR Pure COB LED strip 1220lm/m 24VDC 10W/m IP20 930 5m

Article no.: 172312



## MECHANICAL DATA

Width [mm]	8.0
Length [mm]	5000.0
Height/depth [mm]	1.6
Height [mm]	1.6
Colour	gelb
Model	Band
Self-adhesive	Yes
Lamp type	LED nicht austauschbar
Degree of protection (IP)	IP20
Length of particular segments [mm]	29.4
Lowest bending radius [mm]	30
Number of lamps per meter	544

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Lamp power per meter [W]	10.0
Overall efficiency [lm/W]	122

## LIGHT TECHNICAL DATA

Beam angle [°]	142
Colour rendering index CRI	>90
Colour temperature [K]	3000
Colour of light	White
Luminous flux per meter [lm]	1220
Energy efficiency class provided exchangeable built-in lamp	F
Colour consistency (McAdam ellipse)	SDCM3

## CONNECTION

Number of poles	2
Max. length [mm]	5000

## TEMPERATURE TECHNICAL DATA

Ambient temperature during operating [°C]	- 25 ... + 40
-------------------------------------------	---------------

## PACKAGING INFORMATION

EAN	4250716955279
Article no.	172312

# BL COR Pure COB

**BL COR Pure COB LED strip 1220lm/m 24VDC 10W/m IP20 930 5m**

Article no.: 172312



Net weight [g]	120
Gross weight [g]	120
Customs tariff number	9405423990
Net width [mm]	8.0
Net height [mm]	1.6
Net length [mm]	5000
State of origin	CN

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR ). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)