



COR Pure COB 600 IP65NA

BL COR Pure COB LED-Strip 570lm/m 24VDC 6W/m IP65NA 930 5m

Article no.: 172069

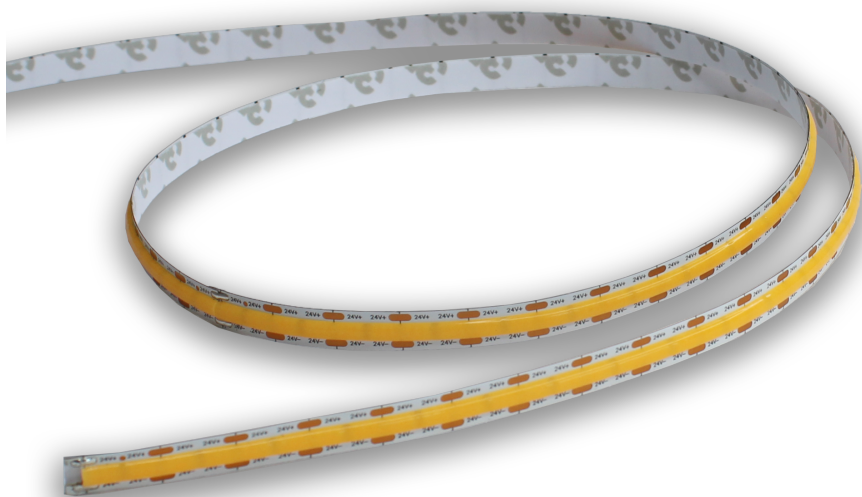

Degree of protection (IP)



Length of particular segments



Colour temperature



Luminous flux per meter

TENDER TEXT

LED-Lichtband COR Pure COB 570lm/m 24VDC 6W/m 95lm/W IP65NA CRI>90 3000K WHITE beidseitig 0,5m Anschlusskabel inkl. Dupont Stecker, 5 Meter/Rolle

TOP-FEATURES

//_ LED strip, all 12.5 mm separable

//_ Without soldering connection

//_ 24 V-Single LED per cut for more flexible application



COR Pure COB 600 IP65NA

BL COR Pure COB LED-Strip 570lm/m 24VDC 6W/m IP65NA 930 5m

Article no.: 172069



MECHANICAL DATA

Width [mm]	8.0
Length [mm]	5000.0
Height [mm]	1.6
Model	Band
Self-adhesive	Yes
Lamp type	LED nicht austauschbar
Distance [mm]	1.56
Distance relating to	LED zu LED
Degree of protection (IP)	IP65NA
Length of particular segments [mm]	12.5
Number of lamps per meter	640

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	6.0
Overall efficiency [lm/W]	95

LIGHT TECHNICAL DATA

Beam angle [°]	140
Colour rendering index CRI	>90
Colour temperature [K]	3000
Colour of light	White
Luminous flux per meter [lm]	570
Colour consistency (McAdam ellipse)	SDCM3

CONNECTION

Conductor cross section [mm ²]	0.5
Number of poles	2
Max. length [mm]	5000

TEMPERATURE TECHNICAL DATA

Ambient temperature during operating [°C]	- 25 ... + 40
Rated life time L70/B50 at 25 °C [h]	60000
Rated life time L80/B10 at 25 °C [h]	60000

PACKAGING INFORMATION

COR Pure COB 600 IP65NA

BL COR Pure COB LED-Strip 570lm/m 24VDC 6W/m IP65NA 930 5m

Article no.: 172069



EAN	4250716952209
Article no.	172069
Net weight [g]	90
Gross weight [g]	120
Gross width [mm]	203.0
Gross height [mm]	17.0
Gross length [mm]	230.0
Customs tariff number	9405423990
Net width [mm]	8.0
Net height [mm]	1.6
Net length [mm]	5000
State of origin	CN

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at