


# Ceiling & wall luminaires Comfort

BL CWL Comfort R500mm 4000lm 38W 110D/I 840 WT DA

Article no.: 730063

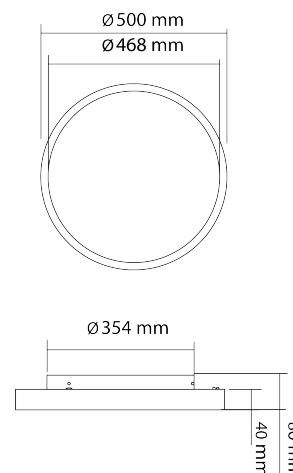


Beam angle



Suitable for emergency  
lighting



Height



Rated luminous flux  
according to IEC  
62722-2-1

## TENDER TEXT

LED wall-mounted ceiling light round diameter 500mm, IP20, protection class I, direct beam angle 110°, additional indirect beam, CRI >80, 4,000 Kelvin, UGR Ceiling & wall luminaires Comfort Article 730063 LED ceiling and wall light with direct/indirect light distribution for a pleasant and homogeneous room experience. Installation option: Bajonettverschluss Light body made of high-quality Aluminium, which is coated with a White White. The cover is made of Plastic opal. Lumen 4000 lm with an efficiency of 105 lm/W and a color rendering of >80, total power 38 W, beam angle 110°, service life 50000 h, protection class IP20, UGR

## TOP-FEATURES

- //\_\_ Color temperature of 4000 K
- //\_\_ In- and direct light component with asymmetrical illumination
- //\_\_ Easy mounting due to Bajonettverschluss
- //\_\_ Housing made of Aluminium White



# Ceiling & wall luminaires Comfort

**BL CWL Comfort R500mm 4000lm 38W 110D/I 840 WT DA**

Article no.: 730063



## MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	500.0
Length [mm]	500.0
Height [mm]	80.0
Diameter [mm]	500
Mounting method	Aufbau
Reflector	White
With movement sensor	nein
Reichweite [m]	4
Type of control gear	LED - Betriebsgerät stromgesteuert
Lamp type	LED nicht austauschbar
Type of fastening	Bajonettverschluss
Direct/indirect components separately adjustable	nein
Suitable for emergency lighting	nein
Material of the cover	Plastic opal
Degree of protection (IP)	IP20
With lamp	yes
Surface finishing	matt
Control gear included	yes
Integrated emergency lighting component	nein
Unified Glare Ratio (UGR)	<25

## ELECTRICAL DATA

Protection class	I
Voltage type	AC
Nominal voltage [V]	230
Operating frequency [Hz]	50 / 60
Type of dimming	DALI
Overall efficiency [lm/W]	105
Nennstrom [A]	0,95
Max. system power [W]	38
Power factor	0.95
Flicker percent (< 165 Hz)	<5

## LIGHT TECHNICAL DATA

Function	DALI
Beam angle [°]	110
Colour rendering index CRI	>80
Light exit	direct / indirect
Light distribution	symmetrical / asymmetrical

# Ceiling & wall luminaires Comfort

**BL CWL Comfort R500mm 4000lm 38W 110D/I 840 WT DA**

Article no.: 730063



Rated luminous flux according to IEC 62722-2-1 [lm]	4000
Colour temperature [K]	4000
Colour of light	White
Energy efficiency class of the built-in lamp	F

## TEMPERATURE TECHNICAL DATA

Ambient temperature during operating [°C]	- 20 ... + 40
Rated life time L80/B10 at 25 °C [h]	50000

## PACKAGING INFORMATION

Article no.	730063
Gross width [mm]	560.0
Gross height [mm]	125.0
Gross length [mm]	560.0
Customs tariff number	94051098
Net width [mm]	500.0
Net height [mm]	80
Net length [mm]	500
State of origin	CN

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)