


# Ceiling- & Wall luminiare Trend

BL CWL Trend+ surface/pendant lum. 875mm 9000lm 90W 90D/I 830-840 white DALI

Article no.: 731026

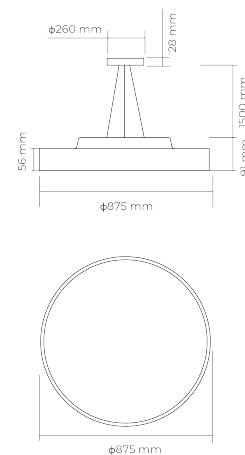

Colour housing



Type of dimming




Rated luminous flux  
according to IEC  
62722-2-1

## TENDER TEXT

LED CWL pendant luminaire, 9,000 lumens, 90W, 90° direct/indirect illumination, CRI >80, 3,000 - 4,000 Kelvin, IP20, protection class I, DALI dimmable, UGR Ceiling- & Wall luminaire Trend Article 731026 Modern surface lights with a wide range of possible uses for representative environments. Whether as a wall or ceiling-mounted version with direct/indirect light component. Mounting type . The color temperature 3000-4000 K can be selected via dip switch. Housing Aluminium White , Cover material Plastic structured , Luminous flux 9000 lm with an efficiency of 100 lm/W and a color rendering of >80 , Total power 90 W, Beam angle 90°, Service life 50000 h, Protection class IP20 , UGR

## TOP-FEATURES

- //\_\_ Color temperature selectable via dip switch 3000-4000 K
- //\_\_ Light emission direct/indirect
- //\_\_ Housing Aluminium White



# Ceiling- & Wall luminiare Trend

**BL CWL Trend+ surface/pendant lum. 875mm 9000lm 90W 90D/I 830-840 white DALI**

Article no.: 731026



## MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	875.0
Length [mm]	875.0
Height [mm]	91.0
Diameter [mm]	875
With movement sensor	nein
Type of control gear	LED - Betriebsgerät stromgesteuert
Lamp type	LED nicht austauschbar
Material of the cover	Plastic structured
Degree of protection (IP)	IP20
Suspension included in delivery	nein
Unified Glare Ratio (UGR)	<19

## ELECTRICAL DATA

Protection class	I
Voltage type	AC
Nominal voltage [V]	200 - 240
Type of dimming	DALI
Overall efficiency [lm/W]	100
Max. system power [W]	90
Power factor	0.9

## LIGHT TECHNICAL DATA

Beam angle [°]	90
Colour rendering index CRI	>80
Light exit	direct / indirect
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	9000
Colour temperature [K]	3000 - 4000
Colour of light	White

## TEMPERATURE TECHNICAL DATA

Rated life time L90/B50 at 25 °C [h]	50000
--------------------------------------	-------

## PACKAGING INFORMATION

EAN	4250716949421
Article no.	731026
Net weight [g]	11010
Gross weight [g]	12170

# Ceiling- & Wall luminiare Trend

**BL CWL Trend+ surface/pendant lum. 875mm 9000lm 90W 90D/I 830-840 white DALI**

Article no.: 731026



Gross width [mm]	920.0
Gross height [mm]	130.0
Gross length [mm]	920.0
Customs tariff number	94051098
Net width [mm]	875.0
Net height [mm]	91
Net length [mm]	875
State of origin	CN

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)