


BL Downlight Protected

BL Downlight Protected recessed luminaire 145mm 2000lm 17W 60D 840 WH IP54 450mA

Article no.: 723006

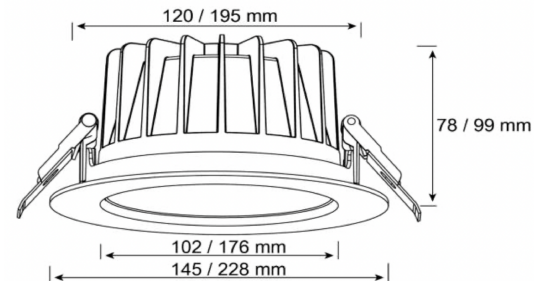

IP54

Degree of protection (IP)

TENDER TEXT

LED recessed downlight round, 2,000 lumen, 17W, 60° direct beam, CRI >80, 4,000 Kelvin, IP54, protection class III, non-dimmable, white aluminium housing, without power supply unit, dimensions: D 145mm x H 78mm, ceiling outlet: D135mm BL Downlight Protected Article 723006 BL Downlight Protected LED downlight with easy installation and commissioning of the LED power supply unit thanks to the pre-installed connection cable; highly efficient reflector made of Aluminium, high-quality, White cooling housing made of aluminum, excellent thermal management, protection class IP54 on the room side; shock resistance; protection class III, luminaire luminous flux 2000 lm; Connected load 17 W, color rendering >80, light color White, color temperature 4000 K, beam angle 60°, glare-free light distribution using a special reflector, UGR

TOP-FEATURES

- //__ Excellent glare value of UGR <19
- //__ Aluminum reflector with mirror optics
- //__ Protection class (room side) IP54
- //__ Plug&Play Connection



BL Downlight Protected

BL Downlight Protected recessed luminaire 145mm 2000lm 17W 60D 840 WH IP54 450mA

Article no.: 723006



MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	145.0
Length [mm]	145.0
Height/depth [mm]	78
Diameter [mm]	145
Installation diameter [mm]	135
Outer diameter [mm]	145
Mounting method	Einbau
With movement sensor	nein
With light sensor	nein
Lamp type	LED nicht austauschbar
Degree of protection (IP)	IP54
With lamp	yes
Control gear included	nein
Unified Glare Ratio (UGR)	<19

ELECTRICAL DATA

Protection class	III
Amperage [A]	0.45
Max. system power [W]	17

LIGHT TECHNICAL DATA

Beam angle [°]	60
Colour rendering index CRI	>80
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	2000
Colour temperature [K]	4000
Colour of light	White
Flicker-free	yes

PACKAGING INFORMATION

EAN	9009453015938
Article no.	723006
Net weight [g]	475
Gross weight [g]	575
Customs tariff number	94051190
State of origin	CN

NECESSARY ACCESSORIES

BL Downlight Protected

BL Downlight Protected recessed luminaire 145mm 2000lm 17W 60D 840 WH IP54 450mA

Article no.: 723006



Article

Article no.

729165

729163

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at