


# BL Downlight Protected

**BL Downlight Protected recessed luminaire 228mm 3300lm 29W 60D 840 WH IP54 800mA**

Article no.: 723010

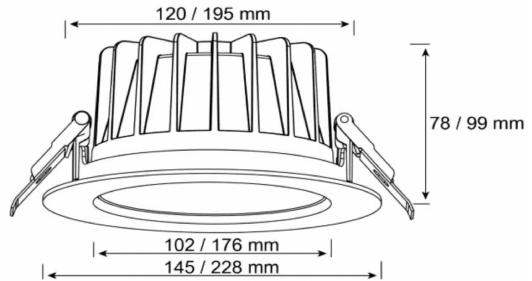

IP54


Degree of protection (IP)

## TENDER TEXT

Recessed LED downlight, round, 3.300 lumens, 29W, 60° direct beam, CRI >80, 4,000 Kelvin, IP54, protection class III, not dimmable, UGR BL Downlight Protected Article 723010 BL Downlight Protected LED downlight with easy installation and commissioning of the LED power supply unit thanks to the pre-installed connection cable; highly efficient reflector made of Aluminium, high-quality, White cooling housing made of aluminum, excellent thermal management, protection class IP54 on the room side; shock resistance ; protection class III , luminaire luminous flux 3300 lm; Connected load 17 W, color rendering >80 , light color White , color temperature 4000 K, beam angle 60°, glare-free light distribution using a special reflector, UGR < 22 , dimensions (L/W/H): 228.0 mm x 228.0 mm x 99 mm

## TOP-FEATURES

- //\_\_ Excellent glare value of UGR < 22
- //\_\_ Aluminum reflector with mirror optics
- //\_\_ Protection class (room side) IP54
- //\_\_ Plug&Play Connection



# BL Downlight Protected

**BL Downlight Protected recessed luminaire 228mm 3300lm 29W 60D 840 WH IP54 800mA**

Article no.: 723010



## MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	228.0
Length [mm]	228.0
Height/depth [mm]	99
Diameter [mm]	228
Installation diameter [mm]	210
Outer diameter [mm]	228
Mounting method	Einbau
With movement sensor	nein
Lamp type	LED nicht austauschbar
Degree of protection (IP)	IP54
With lamp	yes
Control gear included	nein
Unified Glare Ratio (UGR)	< 22

## ELECTRICAL DATA

Protection class	III
Nennstrom [A]	0,8
Max. system power [W]	29
No dim function	yes

## LIGHT TECHNICAL DATA

Beam angle [°]	60
Colour rendering index CRI	>80
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	3300
Colour temperature [K]	4000
Colour of light	White
Flicker-free	yes

## PACKAGING INFORMATION

EAN	9009453015952
Article no.	723010
Net weight [g]	1135
Gross weight [g]	1305
State of origin	CN

## NECESSARY ACCESSORIES

# BL Downlight Protected

**BL Downlight Protected recessed luminaire 228mm 3300lm 29W 60D 840 WH IP54 800mA**

Article no.: 723010



Article

Article no.

**LED DRIVER 220-240V CC 800mA 27-45VDC** 729164  
ON/OFF

**LED DRIVER 220-240V CC 800mA 9-45VDC DALI** 729162

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)