
BL Downlight UGR Flat

BL Downlight UGR Flat recessed luminaire 380mm 1700lm 15W 90D 840 white 450 mA
Article no.: 723020



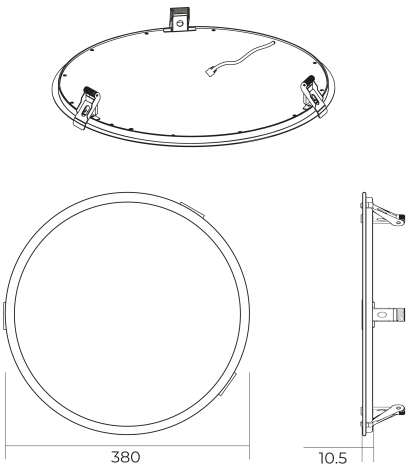

10.5 mm	White	IP20	1700 lm
Height/depth	Colour housing	Degree of protection (IP)	Rated luminous flux according to IEC 62722-2-1

TENDER TEXT

Extra flat round downlight with UGR80, 4000K, D380 x T10.5mm, with 3 spring clamps BL Downlight UGR Flat Article 723020 LED recessed ceiling downlight made of high-quality, White coated Aluminium . The BL Downlight UGR Flat offers high light quality and Symmetrical homogeneous light distribution across the entire light-emitting surface. Designed with protection class IP20 . The luminous flux is 1700 lm with a connected load of 15 W, corresponding to a luminaire efficacy of 113 lm/W. The color rendering index (CRI) is Ra >80 . The light color is White with a color temperature of 4000 K. The beam angle is 90°. Dimensions: Durchmesser 380 mm x Höhe 10.5 mm. Required ceiling cutout 365 mm

TOP-FEATURES

//__ Use where space is limited in the ceiling

//__ Glare limitation <19 despite low height of 10.5 mm

//__ Plug&Play connection

>80 | IP20 | 4000 K

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.

BL Downlight UGR Flat

BL Downlight UGR Flat recessed luminaire 380mm 1700lm 15W 90D 840 white 450 mA
Article no.: 723020

BETTER LIGHT

MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	380.0
Length [mm]	380.0
Height/depth [mm]	10.5
Installation diameter [mm]	365
Outer diameter [mm]	380
Mounting method	Einbau mit 3 Federklemmen
Reflector	White
With movement sensor	nein
Lamp type	LED austauschbar
Degree of protection (IP)	IP20
With lamp	Yes
Control gear included	nein
Suitable for ceiling mounting	Yes
Unified Glare Ratio (UGR)	<19

ELECTRICAL DATA

Voltage type	AC
Nominal voltage [V]	28 - 42
Overall efficiency [lm/W]	113
Nennstrom [A]	0,45
Max. system power [W]	15

LIGHT TECHNICAL DATA

Beam angle [°]	90
Colour rendering index CRI	>80
Light distribution	Symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	1700
Colour temperature [K]	4000
Colour of light	White

TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	50000

PACKAGING INFORMATION

EAN	4250716948868
Article no.	723020
Net weight [g]	1180
Gross weight [g]	1370

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.

BL Downlight UGR Flat

BL Downlight UGR Flat recessed luminaire 380mm 1700lm 15W 90D 840 white 450 mA
Article no.: 723020

Gross width [mm]	385.0
Gross height [mm]	385.0
Gross length [mm]	45.0
Customs tariff number	94054239
Net width [mm]	380.0
Net height [mm]	380
Net length [mm]	10.5
State of origin	CN

NECESSARY ACCESSORIES

Article	Article no.
LED DRIVER 220-240V CC 450mA 27-45VDC ON/OFF	729160
LED DRIVER 220-240V CC 450mA 9-45VDC DALI	729157
LED DRIVER 220-240V CC 450mA 27-45VDC ON/OFF	729160
LED DRIVER 220-240V CC 450mA 9-45VDC DALI	729157

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.