


# BL High Bays Comfort+

BL HB Comfort+ surface/pendant luminaire 487mm 32000lm 200W 110D 840 DALI

Article no.: 740017

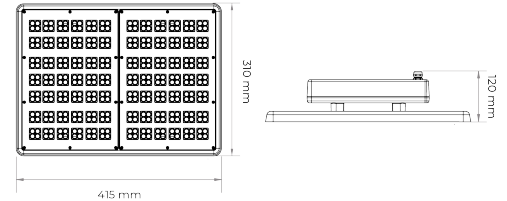


Impact strength



Degree of protection (IP)



Rated luminous flux  
according to IEC  
62722-2-1



Ball impact resistant

## TENDER TEXT

High bay luminaire made of aluminium, incl. DALI converter and wire suspension, 32000lm, 200W, 4000K, CRI80, 110°, IP65, IK10, UGR BL High Bays Comfort+ Article 740017 LED High Bay with LED power supply - Yes - mounted on housing. Highly efficient lens optics. Cooling housing Aluminium, excellent thermal management, suitable for ambient temperatures of -40...+50 °C, protection type IP65, shock resistance IK10, protection class I, ball-proof - Yes - according to DIN 18032-3, service life of 50000 h, luminous flux 32000 lm, connected load 200 W, color rendering >80, color temperature 4000 K, beam angle 110°, glare limit

## TOP-FEATURES

//\_\_ Quick and easy installation and commissioning thanks to pre-installed 3m connection cable and two-point suspension

//\_\_ Highest stability thanks to protection class IP65 and Impact resistance IK10,

Protection class I

//\_\_ ball impact resistant according to DIN 18032-3



# BL High Bays Comfort+

BL HB Comfort+ surface/pendant luminaire 487mm 32000lm 200W 110D 840 DALI

Article no.: 740017



## MECHANICAL DATA

Material housing	Aluminium
Colour housing	Aluminium
Width [mm]	362.0
Length [mm]	487.0
Height/depth [mm]	120
Mounting method	Anbau / Pendel
Type of control gear	LED - Betriebsgerät stromgesteuert
Ball impact resistant	Yes
Lamp type	LED nicht austauschbar
Type of fastening	Seilabhängung / Montagebügel
Impact strength	IK10
Degree of protection (IP)	IP65
Control gear included	Yes
Suspension included in delivery	Yes
Unified Glare Ratio (UGR)	<21

## ELECTRICAL DATA

Protection class	I
Voltage type	AC
Nominal voltage [V]	110 - 277
Operating frequency [Hz]	50 - 60
Type of dimming	DALI
Overall efficiency [lm/W]	160
Max. system power [W]	200
Power factor	0.95
Dimming DALI	Yes

## LIGHT TECHNICAL DATA

Beam angle [°]	110
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	Symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	32000
Colour temperature [K]	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6

## TEMPERATURE TECHNICAL DATA

Impact strength	IK10
Ambient temperature during operating [°C]	- 40... + 50

# BL High Bays Comfort+

**BL HB Comfort+ surface/pendant luminaire 487mm 32000lm 200W 110D 840 DALI**

Article no.: 740017



Rated life time L80/B10 at 25 °C [h] 50000

---

## PACKAGING INFORMATION

EAN 4250716949490

Article no. 740017

Customs tariff number 94054099

Net width [mm] 362.0

Net height [mm] 120

Net length [mm] 487

State of origin CN

---

## NECESSARY ACCESSORIES

Article Article no.

**Mounting bracket for HighBay Comfort+** **749054**

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)