



BL Solar luminaire Street

BL LEDIVA Solar luminaire 4420x223mm 880lm 730 BK Street lens

Article no.: 770022

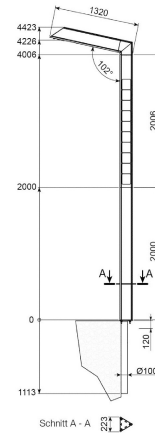

Colour housing



Colour temperature



With programme-controlled lighting control

TENDER TEXT

LED solar light, 880lm, CRI >70, 3,000 Kelvin, street lens, 3xPV modules, 150 Wp, 3.2 VDC LiFe battery, 410 WH-128 Ah, black aluminium housing, hazardous goods class 9 lithium ferrite battery UN3480, dimensions: H 4,420 x W 223mm BL Solar luminaire Street Article 770022 Self-contained outdoor light BL Solar luminaire Street with integrated PV modules, battery, control unit and asymmetrical LED light source. Project-specific configuration of light duration and intensity via online software. Elegant, simple design, triangular pole and bracket made of powder-coated Aluminium in Black. Monocrystalline silicon cells installed vertically in 120° arrangement; PV module output 150 Wp; luminous flux 880 lm, color rendering Ra 70; light color neutral white; color temperature 4000 K; lens particularly suitable for roads; 3.2 V lithium iron phosphate battery IPX8, 410 Wh / 128 Ah, recessed in steel base tube below frost penetration depth; ambient temperature: -20 °C to +50 °C; total height 4.42 m, light point height 4.23 m, width equilateral triangle 223 mm; weight: 120 kg; quick installation by assembling 5 individual parts. Primarily suitable for lighting classes P4-P7 of the standard value table in accordance with EN 13201.

TOP-FEATURES

- //_ Online configurator - for the perfectly adjusted solar light
- //_ 2 different light colours
- //_ With motion detector nein
- //_ §Aluminium Black

BL Solar luminaire Street

BL LEDIVA Solar luminaire 4420x223mm 880lm 730 BK Street lens

Article no.: 770022



BL Solar luminaire Street

BL LEDIVA Solar luminaire 4420x223mm 880lm 730 BK Street lens

Article no.: 770022



MECHANICAL DATA

Material housing	Aluminium
Colour housing	Black
Width [mm]	223.0
Height [mm]	4420.0
With movement sensor	nein
Lamp type	LED nicht austauschbar
With lamp	yes
Control gear included	yes
With programme-controlled lighting control	yes

ELECTRICAL DATA

Protection class	III
------------------	-----

LIGHT TECHNICAL DATA

Function	ohne
Colour rendering index CRI	>70
Rated luminous flux according to IEC 62722-2-1 [lm]	880
Colour temperature [K]	3000
Colour of light	White

* For more detailed information, please refer to the data sheet

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at