

Linear Trend pendant luminaire

BL Linear Trend pendant luminaire 1167mm 5000lm 45W 110D/I 840 black DALI
Article no.: 701005

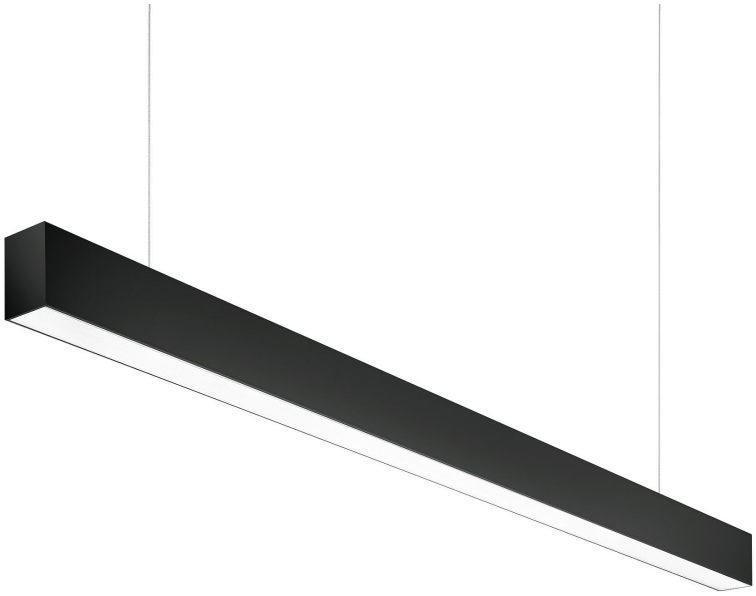



1167.0 mm	Aluminium	4000 K	Yes
Length	Material	Colour temperature	Flicker-free

TENDER TEXT

Linear pendant luminaire, black aluminium housing, opal cover, incl. DALI power supply unit and end caps, 5,000 lumens, 45W, direct and indirect light distribution, 45W CRI >80, 4,000 Kelvin, IP20, dimensions: L 1,167 x W 46 x H 61mm Linear Trend pendant luminaire Article 701005 Linear LED luminaire with combined Plastic Opal optics and direct/indirect lighting; High-quality, black coated profile made of Aluminium , without visible screws, ambient temperatures of -20 ... +40 °C with a service life of 50000 h , luminous flux 5000 lm, connected load 45 W, luminous efficacy 111 lm/W, colour rendering >80 , colour consistency SDCM3 , UGR

TOP-FEATURES

//__ Best light quality with precise glare control and homogeneous light distribution

//__ Available as surface-mounted or pendant light

//__ Light emission direct/indirect

//__ Optics Plastic Opal

>80 IP20 4000 K

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.

Linear Trend pendant luminaire

BL Linear Trend pendant luminaire 1167mm 5000lm 45W 110D/I 840 black DALI
Article no.: 701005

MECHANICAL DATA

Material	Aluminium
Colour housing	black
Width [mm]	46.0
Length [mm]	1167.0
Height/depth [mm]	61
Mounting method	Suspension
Lamp type	LED austauschbar
Type of fastening	Seilabhängung
Suitable for strip light configuration	Yes
Material of the cover	Plastic Opal
Degree of protection (IP)	IP20
With lamp	Yes
Control gear included	Yes
Suspension included in delivery	Yes
Fireproof	Yes
Unified Glare Ratio (UGR)	<25

ELECTRICAL DATA

Protection class	III
Voltage type	AC
Power factor	0,95
Nominal voltage [V]	220 - 240
Operating frequency [Hz]	50 / 60
Overall efficiency [lm/W]	111
Nennstrom [A]	0,196
Max. system power [W]	45
Power factor	0.95
Dimming DALI	Yes
Flicker percent (< 165 Hz)	<3

LIGHT TECHNICAL DATA

Beam angle [°]	110
Colour rendering index CRI	>80
Light exit	direct / indirect
Light distribution	Symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	5000
Colour temperature [K]	4000
Colour of light	White
Energy efficiency class provided exchangeable built-in lamp	F
Colour consistency (McAdam ellipse)	SDCM3
Flicker-free	Yes

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.

Linear Trend pendant luminaire

BL Linear Trend pendant luminaire 1167mm 5000lm 45W 110D/I 840 black DALI
Article no.: 701005

TEMPERATURE TECHNICAL DATA

Ambient temperature during operating [°C]	- 20 ... + 40
Rated life time L80/B10 at 25 °C [h]	50000

PACKAGING INFORMATION

EAN	9009453014528
Article no.	701005
Net weight [g]	1830
Gross weight [g]	2010
Net width [mm]	46.0
Net height [mm]	61
Net length [mm]	1167
State of origin	CN

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261031 | Errors and printing errors are reserved.