


BL Moisture-proof luminaire Protected

BL MPR Protected moisture-proof luminaire 1500mm 8400lm 60W 120D 840 230V

Article no.: 753009

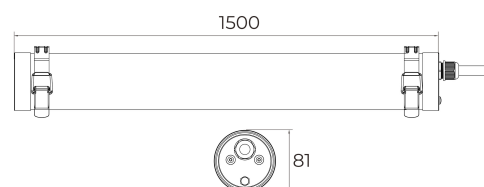

IK08

Impact strength

nein

Explosion-proof

IP69K

Degree of protection (IP)

yes

Fireproof

TENDER TEXT

Moisture lamp incl. converter on/off, 9000 lumens, 4000K, IP69K, IK08, cable length 1m, dimensions: 1500mm BL Moisture-proof luminaire Protected Article 753009 LED damp room light made of PMMA, switchable light with LED converter - yes - mounted in housing, mounting type Surface / Wall-mounted - ceiling mounting with enclosed Mounting brackets possible, quick assembly with 3-poliges Kabel, suitable for geeignet für Durchgangsverdrahtung, UV-resistant nein, fireproof yes, protection class IP69K, shock resistance IK08, corrosion protection yes, explosion protection nein, explosion protection yes, service life of 50000 h, Power 60 W, Color Rendering >80, Color Temperature 4000 K, Beam Angle 120°, Ambient Temperature -20 ... +45 °C, Dimensions (L/W/H): 1500.0 mm x 81.0 mm x 81 mm

TOP-FEATURES

//__ LED luminare tested for impact resistance IK08 and protection class IP69K

//__ Type of wiring geeignet für Durchgangsverdrahtung

//__ LED surface-mounted light with integrated converter - yes

//__

Suitable for challenging applications in wet room applications thank you IP69K



BL Moisture-proof luminaire Protected

BL MPR Protected moisture-proof luminaire 1500mm 8400lm 60W 120D 840 230V

Article no.: 753009



MECHANICAL DATA

| | |
|------------------------------------|--------------------------|
| Material | PMMA |
| Colour housing | White |
| Width [mm] | 81.0 |
| Length [mm] | 1500.0 |
| Height/depth [mm] | 81 |
| Diameter [mm] | 81 |
| Mounting method | Surface / Wall - mounted |
| UV-resistant | nein |
| With movement sensor | nein |
| With switch | nein |
| Corrosion protection | yes |
| Lamp type | LED nicht austauschbar |
| Type of fastening | Mounting brackets |
| Impact strength | IK08 |
| Explosion-proof | nein |
| Degree of protection (IP) | IP69K |
| With lamp | yes |
| Length of particular segments [mm] | 1500.0 |
| Control gear included | yes |
| Fireproof | yes |

ELECTRICAL DATA

| | |
|---------------------------|------------------------------------|
| Protection class | I |
| Voltage type | AC |
| Nominal voltage [V] | 220 - 240 |
| Operating frequency [Hz] | 50 / 60 |
| Overall efficiency [lm/W] | 140 |
| Max. system power [W] | 60 |
| Power factor | 0.95 |
| Type of wiring | geeignet für Durchgangsverdrahtung |
| No dim function | yes |

LIGHT TECHNICAL DATA

| | |
|---|-------------|
| Beam angle [°] | 120 |
| Colour rendering index CRI | >80 |
| Light exit | direkt |
| Light distribution | symmetrical |
| Rated luminous flux according to IEC 62722-2-1 [lm] | 8400 |
| Colour temperature [K] | 4000 |
| Colour of light | White |
| Flicker-free | yes |

BL Moisture-proof luminaire Protected

BL MPR Protected moisture-proof luminaire 1500mm 8400lm 60W 120D 840 230V

Article no.: 753009



CONNECTION

| | |
|-----------------|-------------------|
| Connection type | 3 - poliges Kabel |
| Number of poles | 3 |

TEMPERATURE TECHNICAL DATA

| | |
|---|---------------|
| Impact strength | IK08 |
| Ambient temperature during operating [°C] | - 20 ... + 45 |
| Rated life time L80/B10 at 25 °C [h] | 50000 |

PACKAGING INFORMATION

| | |
|-----------------------|---------------|
| EAN | 4250716950243 |
| Article no. | 753009 |
| Customs tariff number | 94051040 |
| Net length [mm] | 1500 |
| State of origin | CN |

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at