


# BL Moisture-proof luminaire Pure+

**BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V**

Article no.: 752021

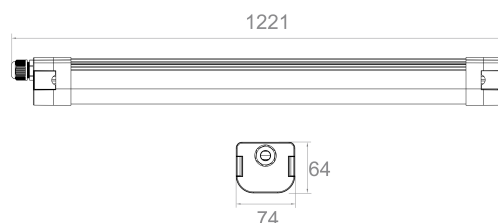

**IK08**

Impact strength

**IP65**

Degree of protection (IP)

**yes**

Control gear included

**yes**

Fireproof

## TENDER TEXT

LED damp-proof light, plastic housing with aluminum interior, IP65, IK08, 4000K, luminous flux 5,600 lm, 140 lm/W, CRI>80, incl. converter, fire-protected, through-wiring possible, 1,221x74x64mm, BL Moisture-proof luminaire Pure+ Article 752021 LED moisture-proof luminaire made of Kunststoff, switchable luminaire with LED converter - yes mounted in housing, mounting type Anbau - ceiling mounting with enclosed Mounting brackets possible, geeignet für Durchgangsverdrahtung, switch nein, fireproof yes, protection class IP65, impact resistance IK08, Lifetime of 50000 h, Power 40 W, Colour rendering >80, colour temperature 4000 K, beam angle 120°, ambient temperature -20...+40 °C, dimensions (L/W/H): 1221.0 mm x 74.0 mm x 64 mm

## TOP-FEATURES

//\_\_ Very robust thanks to protection class IP65

//\_\_ Fireproof yes

//\_\_ Impact resistance IK08



# BL Moisture-proof luminaire Pure+

**BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V**

Article no.: 752021



## MECHANICAL DATA

Material	Kunststoff
Colour housing	White
Width [mm]	74.0
Length [mm]	1221.0
Height/depth [mm]	64
Mounting method	Anbau
With movement sensor	nein
With switch	nein
Lamp type	LED nicht austauschbar
Type of fastening	Mounting brackets
Material of the cover	Plastic opal
Impact strength	IK08
Degree of protection (IP)	IP65
With lamp	yes
Control gear included	yes
Fireproof	yes

## ELECTRICAL DATA

Nominal voltage [V]	220 - 240
Operating frequency [Hz]	50 / 60
Overall efficiency [lm/W]	140
Max. system power [W]	40
Power factor	0.95
Type of wiring	geeignet für Durchgangsverdrahtung

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	5600
Colour temperature [K]	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6

## TEMPERATURE TECHNICAL DATA

Impact strength	IK08
Ambient temperature during operating [°C]	- 20... + 40
Rated life time L70/B10 at 25 °C [h]	50000

# BL Moisture-proof luminaire Pure+

**BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V**

Article no.: 752021



## PACKAGING INFORMATION

EAN	4250716949452
Article no.	752021
Net weight [g]	9000
Gross weight [g]	10500
Gross width [mm]	80.0
Gross height [mm]	70.0
Gross length [mm]	1280.0
Customs tariff number	94054099
Net width [mm]	74.0
Net height [mm]	64
Net length [mm]	1221
State of origin	CN

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)