


# BL Moisture-proof luminaire Trend+

**BL MPR Trend+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 white 230V PA**


Article no.: 751004

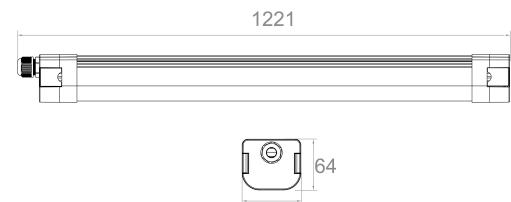

Impact strength



Degree of protection (IP)



Fireproof



Type of wiring

## TENDER TEXT

LED MPR moisture-proof luminaire, 5,600 lumen, 40W, 120° direct beam, CRI >80, 4,000 Kelvin, IP65, IK08, protection class III, non-dimmable, fire-resistant, UV-resistant, UGR BL Moisture-proof luminaire Trend+ Article 751004 LED damp room light made of PC (Polycarbonate) ; switchable with LED converter - yes - mounted in housing; Mounting type Aufbau - Ceiling mounting with enclosed Mounting brackets possible, quick mounting with 3-pole plug-in clip , geeignet für Durchgangsverdrahtung , UV-resistant yes , fireproof yes , protection class IP65 , shock resistance IK08 , service life of 50000 h , luminous flux variably adjustable via dip switch, connected load depends on dip switch setting , unified Glare value UGR 80 , Color temperature 4000 K, Beam angle 120°, Ambient temperature -20 ... +40 °C, Dimensions (L/W/H): 1221.0 mm x 74.0 mm x 64 mm

## TOP-FEATURES

- //\_\_ Slim and compact moisture-proof luminaire geeignet für Durchgangsverdrahtung
- //\_\_ Integrated motion sensor nein
- //\_\_ Power adjustable via dip switches §
- //\_\_ Protection class IP65 , making it suitable for outdoor use



# BL Moisture-proof luminaire Trend+

**BL MPR Trend+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 white 230V PA**

Article no.: 751004



## MECHANICAL DATA

Material	PC (Polycarbonat)
Colour housing	White
Width [mm]	74.0
Length [mm]	1221.0
Height/depth [mm]	64
Mounting method	Aufbau
UV-resistant	yes
With movement sensor	nein
With switch	yes
Lamp type	LED nicht austauschbar
Type of fastening	Mounting brackets
Impact strength	IK08
Degree of protection (IP)	IP65
With lamp	yes
Control gear included	yes
Fireproof	yes
Unified Glare Ratio (UGR)	<25

## ELECTRICAL DATA

Protection class	III
Voltage type	AC
Nominal voltage [V]	220 - 240
Operating frequency [Hz]	50 / 60
Overall efficiency [lm/W]	140
Max. system power [W]	40
Power factor	0.95
Type of wiring	geeignet für Durchgangsverdrahtung
No dim function	yes

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	5600
Colour temperature [K]	4000
Colour of light	White
Energy efficiency class of the built-in lamp	E

## CONNECTION

# BL Moisture-proof luminaire Trend+

**BL MPR Trend+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 white 230V PA**

Article no.: 751004



Connection type

3 - pole plug - in clip

## TEMPERATURE TECHNICAL DATA

Impact strength	IK08
Ambient temperature during operating [°C]	- 20 ... + 40
Rated life time L80/B10 at 25 °C [h]	50000

## PACKAGING INFORMATION

EAN	9009453032324
Article no.	751004
Net weight [g]	1130
Gross weight [g]	1500
Gross width [mm]	80.0
Gross height [mm]	70.0
Gross length [mm]	1280.0
Net width [mm]	74.0
Net height [mm]	64
Net length [mm]	1221
State of origin	CN

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)