


# BL ONE Comfort TW 3000 >80

**BL ONE Comfort TW LED strip 3000lm/m 24VDC 24W/m IP20 827-865 5.025m**

Article no.: 102088

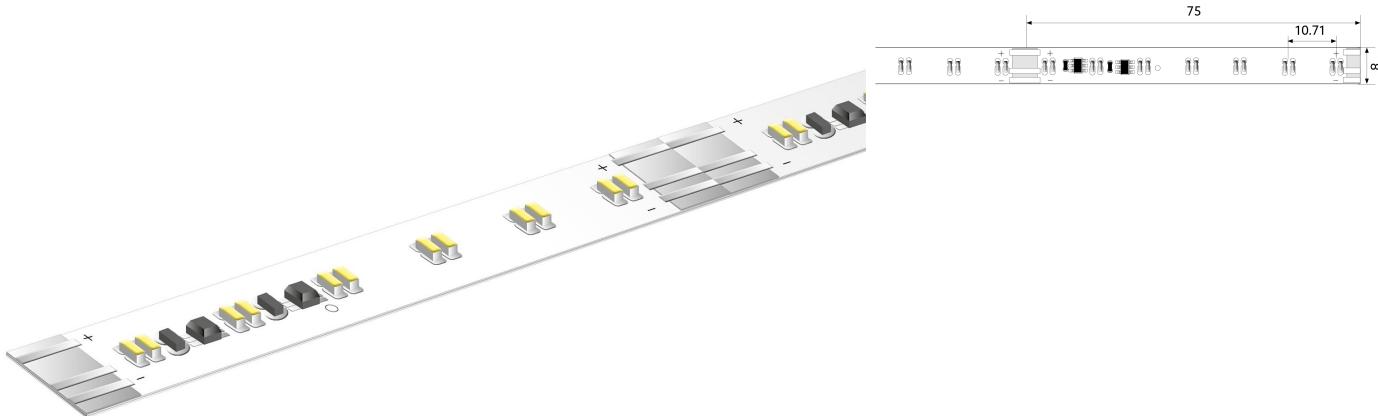

24  
V

Lamp voltage

5475  
mm

Max. length

75.0  
mm

Length of particular segments

2700 - 6500  
K

Colour temperature

## TENDER TEXT

LED strip ONE Comfort TW 3000 lm/m 24VDC, 24 W/m, 125 lm/W, IP20, CRI>80, 2-layer Flex, colour change 2700 - 6500 K, Tunablewhite, 500 mm connection cable on both sides, 5.025 metres LED module BL ONE Comfort TW 3000 >80 Article 102088 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h. The BL ONE Comfort TW 3000 >80 LED-strip has a luminous flux of 3000 lm at 24.0 W, resulting in an efficiency of 125 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5475 mm can be achieved. In terms of lighting, the module has a colour temperature of 2700 - 6500 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 75.0 mm, resulting in a LED distance of 10.7 mm. Degree of protection IP20 Dimension (L x W x H): 5025.0 mm x 8.0 mm x 1.5 mm

## TOP-FEATURES

//\_\_ BL TW is the name for Tuneable White

//\_\_ With this series becomes a phy siologically valuabl e light (= Human Centric Lighting) generated


//\_\_ Long cable lengths an d better stability through double layers

//\_\_ Continuously dimming between 2700 - 6500 K

# BL ONE Comfort TW 3000 >80

**BL ONE Comfort TW LED strip 3000lm/m 24VDC 24W/m IP20 827-865 5.025m**

Article no.: 102088



# BL ONE Comfort TW 3000 >80

**BL ONE Comfort TW LED strip 3000lm/m 24VDC 24W/m IP20 827-865 5.025m**

Article no.: 102088



## MECHANICAL DATA

Width [mm]	8.0
Length [mm]	5025.0
Height/depth [mm]	1.5
Height [mm]	1.5
Colour	White
Model	Band
Self-adhesive	yes
Lamp type	LED nicht austauschbar
Distance [mm]	10.7
Distance relating to	LED zu LED
Degree of protection (IP)	IP20
Length of particular segments [mm]	75.0
Lowest bending radius [mm]	20
With connection set	yes
With end piece	nein
Number of lamps per meter	186

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	24.0
Overall efficiency [lm/W]	125

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Colour temperature [K]	2700 - 6500
Colour of light	White
Luminous flux per meter [lm]	3000
Energy efficiency class provided exchangeable built-in lamp	E
Colour consistency (McAdam ellipse)	SDCM3

## CONNECTION

Conductor cross section [mm <sup>2</sup> ]	0.5
Number of poles	3
Max. length [mm]	5475

## TEMPERATURE TECHNICAL DATA

# BL ONE Comfort TW 3000 >80

**BL ONE Comfort TW LED strip 3000lm/m 24VDC 24W/m IP20 827-865 5.025m**

Article no.: 102088



Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60
Ambient temperature during operating [°C]	- 20 ... + 45
Rated life time L80/B10 at 25 °C [h]	60000

## PACKAGING INFORMATION

EAN	4250716941708
Article no.	102088
Net weight [g]	90
Gross weight [g]	185.5
Gross width [mm]	200.0
Gross height [mm]	18.0
Gross length [mm]	200.0
Customs tariff number	94054099
Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	5025
State of origin	AT

\* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 °C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)