



# BL ONE Select Retail 1300

BL ONE Select Retail LED strip 1200lm/m 24VDC 11.5W/m IPX6 935 20m

Article no.: 101823

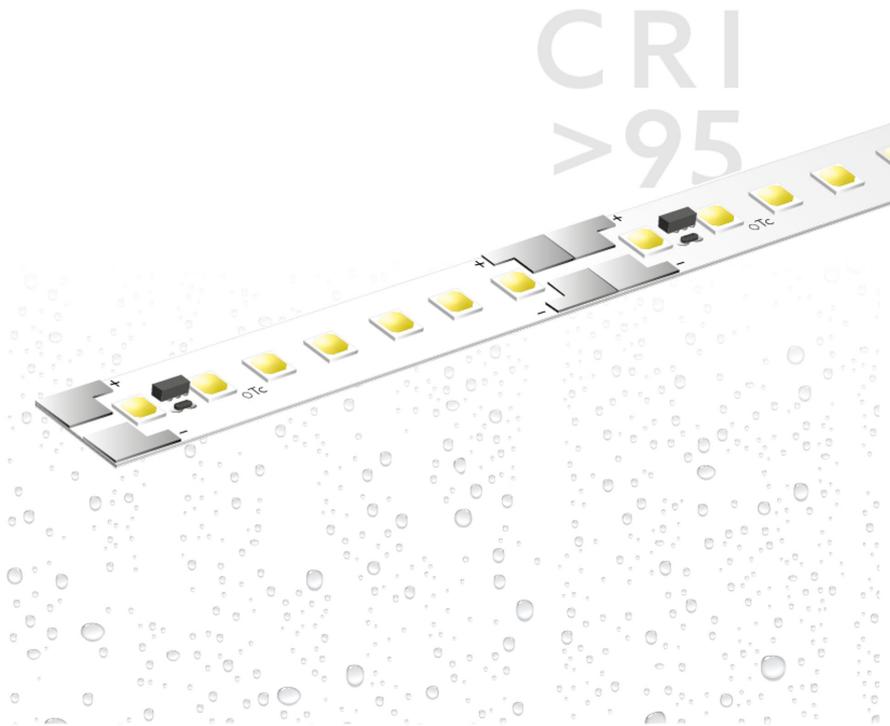

Lamp voltage



Max. length



Colour rendering index CRI



Luminous flux per meter

## TENDER TEXT

LED strip ONE Select Retail 1130 lm/m 24VDC, 11.5W/m, 104 lm/W, IPX6, CRI>95, 3500K, WHITE, 500 mm connection cable on both sides, 20 metres LED module BL ONE Select Retail 1300 Article 101823 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h . The BL ONE Select Retail 1300 LED-strip has a luminous flux of 1200 lm at 11.5 W, resulting in an efficiency of 104 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 7500 mm can be achieved. In terms of lighting, the module has a colour temperature of 3500 K and a beam angle of 120°. All this with a colour rendering index of >95 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IPX6 Dimension (L x W x H): 20000.0 mm x 8.0 mm x 1.5 mm

## TOP-FEATURES

- //\_\_ Best light quality for shop lighting thanks to CRI >95
- //\_\_ Long line lengths and better stability due to double layer
- //\_\_ Wide choice of light colors and lumen packages
- //\_\_ Available in Degree of Protection IPX6



# BL ONE Select Retail 1300

BL ONE Select Retail LED strip 1200lm/m 24VDC 11.5W/m IPX6 935 20m

Article no.: 101823



## MECHANICAL DATA

Width [mm]	8.0
Length [mm]	20000.0
Height/depth [mm]	1.5
Height [mm]	1.5
Colour	White
Model	Band
Self-adhesive	Yes
Lamp type	LED nicht austauschbar
Distance [mm]	7.14
Distance relating to	LED zu LED
Degree of protection (IP)	IPX6
Length of particular segments [mm]	50.0
Lowest bending radius [mm]	20
With connection set	Yes
With end piece	nein
Number of lamps per meter	140

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	11.5
Overall efficiency [lm/W]	104

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>95
Colour temperature [K]	3500
Colour of light	White
Luminous flux per meter [lm]	1200
Energy efficiency class provided exchangeable built-in lamp	F
Colour consistency (McAdam ellipse)	SDCM3

## CONNECTION

Conductor cross section [mm <sup>2</sup> ]	0.5
Number of poles	2
Max. length [mm]	7500

## TEMPERATURE TECHNICAL DATA

# BL ONE Select Retail 1300

**BL ONE Select Retail LED strip 1200lm/m 24VDC 11.5W/m IPX6 935 20m**

Article no.: 101823



Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60
Ambient temperature during operating [°C]	- 20 ... + 45
Rated life time L80/B10 at 25 °C [h]	60000

## PACKAGING INFORMATION

EAN	4250716935783
Article no.	101823
Gross width [mm]	200.0
Gross height [mm]	18.0
Gross length [mm]	200.0
Customs tariff number	94054099
Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	20000
State of origin	AT

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR ). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)