


BL Panel Round

BL Panel Round 600mm 3350lm 36W 110D 840 white 1050mA


Article no.: 714012

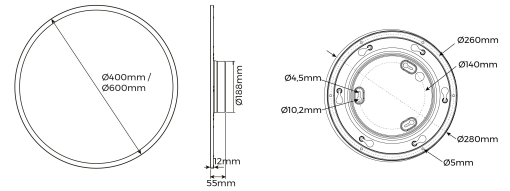

Beam angle



Degree of protection (IP)



Colour temperature



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel round, 3,350 lumens, 110° direct beam, CRI >80, 4,000 Kelvin, IP20, protection class III, not dimmable, white aluminum housing, without power supply, dimensions: D 600mm x 12mm BL Panel Round Article 714012 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 12 mm. Homogeneous light distribution across the entire light emission surface, service life of 50000 h , luminous flux 3350 lm; Current max. 1,0 A, color rendering >80 ; light color White , color temperature 4000 K; UGR

TOP-FEATURES

- //_ Rahmenmaterial: Aluminium
- //_ Befestigung des Leuchtenkörpers über Bajonettverschlussstechnik
- //_ Unterschiedlichste Montagearten Surface / Installation / Suspension möglich
- //_ Flimmerfrei



BL Panel Round

BL Panel Round 600mm 3350lm 36W 110D 840 white 1050mA

Article no.: 714012



MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width [mm]	600.0
Length [mm]	600.0
Height/depth [mm]	12
Diameter [mm]	600
Installation diameter [mm]	188
Outer diameter [mm]	600
Mounting method	Surface / Installation / Suspension
With movement sensor	nein
With light sensor	nein
Lamp type	LED nicht austauschbar
Material of the cover	Plastic Opal
Degree of protection (IP)	IP20
With lamp	Yes
Control gear included	nein
Installation height/depth [mm]	43
Unified Glare Ratio (UGR)	<22

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage [V]	35 - 38
Overall efficiency [lm/W]	93
Nennstrom [A]	1,0
Max. system power [W]	36
Dimming depending on control gear	Yes

LIGHT TECHNICAL DATA

Beam angle [°]	110
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	Symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	3350
Colour temperature [K]	4000
Colour of light	White
Energy efficiency class of the built-in lamp	F
Colour consistency (McAdam ellipse)	SDCM4

TEMPERATURE TECHNICAL DATA

BL Panel Round

BL Panel Round 600mm 3350lm 36W 110D 840 white 1050mA

Article no.: 714012



Ambient temperature during operating [°C]	- 20 ... + 40
Rated life time L70/B10 at 25 °C [h]	50000

PACKAGING INFORMATION

EAN	4250716949803
Article no.	714012
Net weight [g]	4740
Gross weight [g]	5700
Net width [mm]	600.0
Net height [mm]	12
Net length [mm]	600
State of origin	CN

NECESSARY ACCESSORIES

Article	Article no.
LED DRIVER 220-240V CC 1000mA 27-42VDC ON/OFF	719245
LED DRIVER 220-240V CC 1000mA 9-42VDC DALI	719240

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at