
BL COR Skyline

BL Skyline LED-Lichtsystem 1320lm/m 24VDC 13,5W/m IP20 940 6m schwarz
Article no.: 171969

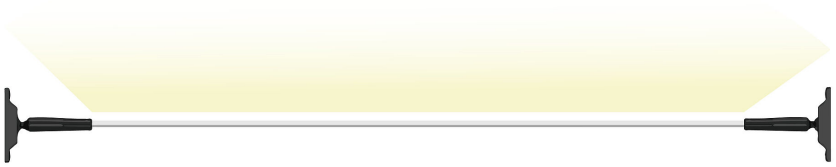

6000.0 mm	black	austausch	rect / indire
Length	Colour housing	Lamp type	Light exit

TENDER TEXT

LED-Lichtsystem Skyline 6m schwarz mit 5m LED-Strip 1320 lm/m und Montagematerial 24VDC 13,5W/m 98lm/W IP20 CRI>90 4000K WHITE, BL & COR Label Steckerfertig mit 2m Zuleitung weiß LED Module BL COR Skyline Item 171969 Linear LED strip light on steel tape with movable mounting modules and cable for easy assembly and quick installation. The BL COR Skyline LED strip light has a luminous flux of 1320 lm with a power of 13.5 W, giving an efficiency of 98 lm/W. With a nominal voltage of 24 V DC at the connection. In terms of lighting, the module has a color temperature of 4000 K and a beam angle of 120°. All with a color rendering index of >90 . The light strip can be divided every 50.0 mm, resulting in an LED spacing of 8.33 mm. Protection class IP20 . Dimensions (L x W x H): 6000.0 mm x 35.0 mm x 130 mm

TOP-FEATURES

//__ The flexible rotation axis offers a wide range of angles

//__ Innovative aluminum strip solution with integrated LED strip

//__ Simple configuration - cut to length, plug in - done

//__ Replaceable LED strips up to 13.5 W Watt

>90 | IP20 | 4000 K

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261105 | Errors and printing errors are reserved.

BL COR Skyline

BL Skyline LED-Lichtsystem 1320lm/m 24VDC 13,5W/m IP20 940 6m schwarz
Article no.: 171969

MECHANICAL DATA

Colour housing	black
Width [mm]	35.0
Length [mm]	6000.0
Height/depth [mm]	130
With movement sensor	nein
With switch	nein
Lamp type	LED austauschbar
Distance [mm]	8.33
Distance relating to	LED zu LED
Degree of protection (IP)	IP20
With lamp	Yes
Length of particular segments [mm]	50.0
Control gear included	nein
Suspension included in delivery	Yes
Light distributor	ohne

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage [V]	24
Overall efficiency [lm/W]	98
Max. system power [W]	13.5

LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>90
Light exit	direct / indirect
Light distribution	Symmetrical
Rated luminous flux according to IEC 62722-2-1 [lm]	1320
Colour temperature [K]	4000
Colour of light	White

CONNECTION

Electrical connection with connector system	Yes

PACKAGING INFORMATION

EAN	4250716950366
Article no.	171969
Net weight [g]	1730
Gross weight [g]	1730

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261105 | Errors and printing errors are reserved.

BL COR Skyline

BL Skyline LED-Lichtsystem 1320lm/m 24VDC 13,5W/m IP20 940 6m schwarz
Article no.: 171969

Gross width [mm]	350.0
Gross height [mm]	365.0
Gross length [mm]	80.0
Customs tariff number	94059900
State of origin	CN

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

NECESSARY ACCESSORIES

Article	Article no.
	171864

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at