


DALI

LED DRIVER 220-240V CC 350mA 9-45VDC DALI

Article no.: 729145

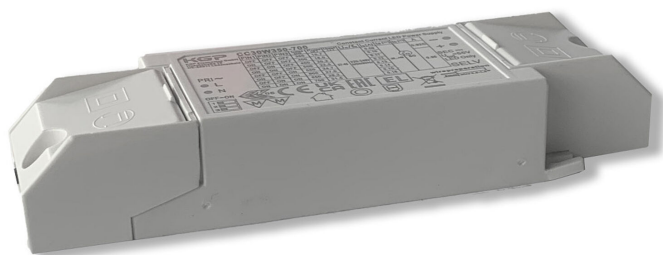

TENDER TEXT

incl. connection cable for FDL180 BILTON LEDON Technology DALI Article 729145 The power supply can be used for a output voltage range of 9-45 V. Constant current 350 mA. The supply voltage of the power supply is 198 - 264 V and has a IP20 protection type and protection class II . Control signal DALI/Switch . Dimensions (L x W x H): 137.5 mm x 44.0 mm x 23.0 mm



DALI

LED DRIVER 220-240V CC 350mA 9-45VDC DALI

Article no.: 729145



MECHANICAL DATA

Housing	Kunststoffgehäuse
Width [mm]	44.0
Length [mm]	137.5
Height [mm]	23.0
Colour	White
Model	dynamisch
Control signal	DALI / Switch
Suitable for outdoor use	nein
Degree of protection (IP)	IP20
Core cross section [mm ²]	0,5 - 1,5

ELECTRICAL DATA

Protection class	II
Voltage type	AC / DC
Control signal	DALI / Switch
Input voltage range [V]	198 - 264
Output voltage range [V]	9 - 45
Output current range [mA]	350
Standby power consumption (solstandby) [W]	0.45
Suitable for constant current	yes
Suitable for constant voltage	nein
Dimming DALI	yes

CONNECTION

Core cross section [mm ²]	0,5 - 1,5
---------------------------------------	-----------

TEMPERATURE TECHNICAL DATA

Operation temperature at Tc [°C]	0 ... + 80
Ambient temperature during operating [°C]	- 20 ... + 45

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at