



Drive Dim IP Outdoor

BL DRIVE DIM IP 100W 24V IP67 DALI Power Supply Outdoor

Article no.: 172042

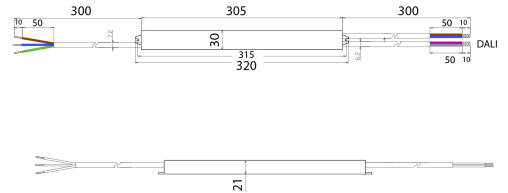

Output voltage range



Output power range



Degree of protection (IP)

TENDER TEXT

Power supply dimmable for outdoor use, max. output power 100W, maximum input voltage 220-240VAC, output voltage 24V, SELV, protection class IP67. Protection class I, DALI, dimensions L x W x H = 320 x 30 x 21 mm BILTON LEDON Technology power supply Drive Dim IP Outdoor Article 172042 The power supply can be used up to 0 - 100 W output power and 24 V output voltage. The supply voltage of the power supply is 176 - 264 V and has a IP67 protection class and protection class I . Dimension (L x W x H): 305.0 mm x 30.0 mm x 21.0 mm



Drive Dim IP Outdoor

BL DRIVE DIM IP 100W 24V IP67 DALI Power Supply Outdoor

Article no.: 172042



MECHANICAL DATA

Housing	Aluminiumgehäuse
Width [mm]	30.0
Length [mm]	305.0
Height [mm]	21.0
Colour	White
Control signal	DALI
With overheating protection	Yes
Suitable for outdoor use	Yes
Degree of protection (IP)	IP67

ELECTRICAL DATA

Protection class	I
Control signal	DALI
With overheating protection	Yes
Input voltage range [V]	176 - 264
Output voltage range [V]	24
Output power range [W]	0 - 100
Frequency supply voltage (range) [Hz]	50 - 60
Output current range [mA]	4170
Overload protection	Yes
Standby power consumption (solstandby) [W]	0.5
Suitable for constant voltage	Yes
Suitable for DC-voltage (primary side)	Yes
Power factor	0.95
Dimming DALI	Yes

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 40 ... + 85
Operation temperature at Tc [°C]	- 25 ... + 45
Lifespan at 20 °C [h]	50000

PACKAGING INFORMATION

EAN	4250716951479
Article no.	172042
Net weight [g]	420
Gross weight [g]	420
Customs tariff number	85044083
Net width [mm]	320.0
Net height [mm]	21
Net length [mm]	30

Drive Dim IP Outdoor

BL DRIVE DIM IP 100W 24V IP67 DALI Power Supply Outdoor

Article no.: 172042



State of origin

CN

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at