
Drive IP Outdoor

BL DRIVE IP 60W 24V IP67 Power Supply Outdoor Article no.: 172032



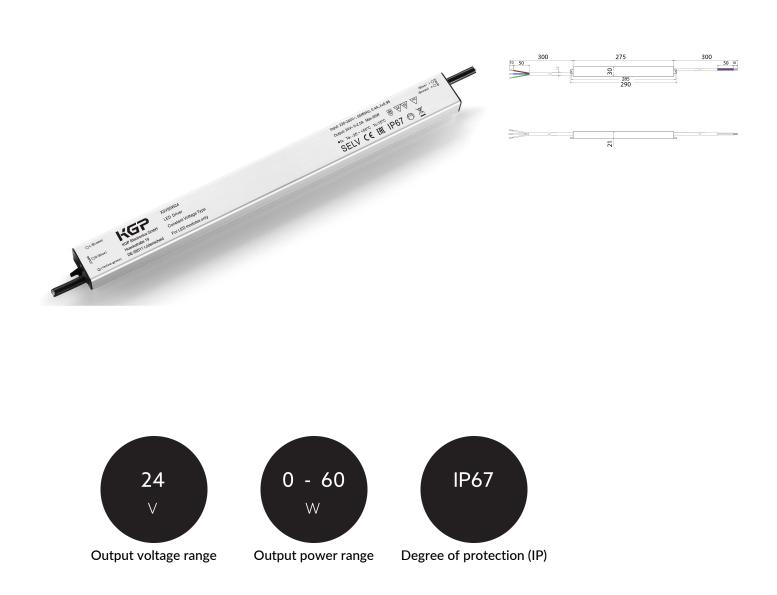

TENDER TEXT

Power supply for outdoor use, max. output power 60W, maximum input voltage 220-240VAC, output voltage 24V, SELV, protection class IP67. Protection class I, dimensions L x W x H = 290 x 30 x 21 mm BILTON LEDON Technology power supply Drive IP Outdoor Article 172032 The power supply can be used up to 0 - 60 W output power and 24 V output voltage. The supply voltage of the power supply is 176 - 264 V and has a IP67 protection class and protection class I. Dimension (L x W x H): 290.0 mm x 30.0 mm x 21.0 mm



Drive IP Outdoor

BL DRIVE IP 60W 24V IP67 Power Supply Outdoor

Article no.: 172032



MECHANICAL DATA

Housing	Aluminiumgehäuse
Width [mm]	30.0
Length [mm]	290.0
Height [mm]	21.0
Colour	White
Control signal	ohne
With overheating protection	yes
Suitable for outdoor use	yes
Degree of protection (IP)	IP67

ELECTRICAL DATA

Protection class	1
Control signal	ohne
With overheating protection	yes
Imput voltage range [V]	176 - 264
Output voltage range [V]	24
Output power range [W]	0 - 60
Frequency supply voltage (range) [Hz]	50 - 60
Output current range [mA]	2500
Overload protection	yes
Standby power consumption (solstandby) [W]	0.5
Suitable for constant voltage	yes
Suitable for DC-voltage (primary side)	yes
Power factor	0.95
No dim function	yes

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 40 + 85
Operation temperature at Tc [°C]	- 25 + 50
Lifespan at 20 °C [h]	50000

PACKAGING INFORMATION

EAN	4250716951578
Article no.	172032
Net weight [g]	390
Gross weight [g]	390
Customs tariff number	85044083
Net width [mm]	290.0
Net height [mm]	21
Net length [mm]	30

© BILTON LEDON Technology | www.better-light.at

Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at Version: 20250709 | Errors and printing errors are reserved.

Drive IP Outdoor

BL DRIVE IP 60W 24V IP67 Power Supply Outdoor

Article no.: 172032



3

State of origin

CN

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at