


# BL AIR TOP 600 EOL


BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 830 1m  
Article no.: 102130



Lamp voltage

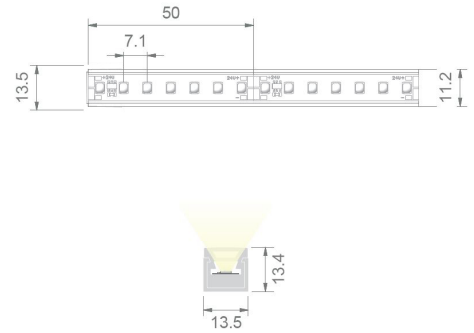

Max. length



Colour rendering index CRI



Luminous flux per meter

## TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 600 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, OSP Flex, 24VDC 7.5W/m IP67 CRI>80 3000K WHITE 1.01m LED module BL AIR TOP 600 EOL Article 102130 Linear LED light strip on a flexible circuit board. Installation using appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +55 °C at a service life of 50000 h . At an ambient temperature of 85°C, a lifetime of 50,000 hours can still be guaranteed. Up to 95°C the lifetime is 30,000 hours and at temperatures of 100°C still 16,000 hours (> L70B50). The BL AIR TOP 600 EOL LED-strip has a luminous flux of 600 lm at 7.5 W, resulting in an efficiency of 80 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5010 mm can be achieved. In terms of lighting, the module has a colour temperature of 3000 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IP67 Smallest possible bending radius 200 mm Dimension (L x W x H): 1010.0 mm x 13.2 mm x 12.0 mm

## TOP-FEATURES

- //\_ Homogeneously luminous light line without visible light points
- //\_ IP67 -protection in highly flexible silicone jacket
- //\_ UL certified
- //\_ New connection: the end caps close straight to the profile

# BL AIR TOP 600 EOL

**BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 830 1m**

Article no.: 102130



24 V	>80	IP67	3000 K
------	-----	------	--------

# BL AIR TOP 600 EOL

BL AIR Top LED light tube 600lm/m 24VDC 7.5W/m IP67 830 1m  
Article no.: 102130



## MECHANICAL DATA

Width [mm]	13.2
Length [mm]	1010.0
Height/depth [mm]	12
Height [mm]	12.0
Colour	White
Model	Schlauch
Self-adhesive	nein
Lamp type	LED nicht austauschbar
Distance [mm]	7.14
Distance relating to	LED zu LED
Degree of protection (IP)	IP67
Length of particular segments [mm]	50.0
Lowest bending radius [mm]	200
Number of lamps per meter	140

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Lamp power per meter [W]	7.5
Overall efficiency [lm/W]	80

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>80
Colour temperature [K]	3000
Colour of light	White
Luminous flux per meter [lm]	600
Colour consistency (McAdam ellipse)	SDCM3

## CONNECTION

Conductor cross section [mm <sup>2</sup> ]	0.5
Number of poles	2
Max. length [mm]	5010

## TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 20 ... + 55
Ambient temperature during operating [°C]	- 20 ... + 55
Rated life time L80/B10 at 25 °C [h]	50000

# BL AIR TOP 600 EOL

**BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 830 1m**

Article no.: 102130



## PACKAGING INFORMATION

EAN	4250716944655
Article no.	102130
Net weight [g]	0.125
Gross weight [g]	0.125
Gross width [mm]	330.0
Gross height [mm]	27.0
Gross length [mm]	330.0
Customs tariff number	94054039
Net width [mm]	13.2
Net height [mm]	12
Net length [mm]	1010
State of origin	AT

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of +/- 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)